


THE UNIVERSAL

FLANGE GUARD

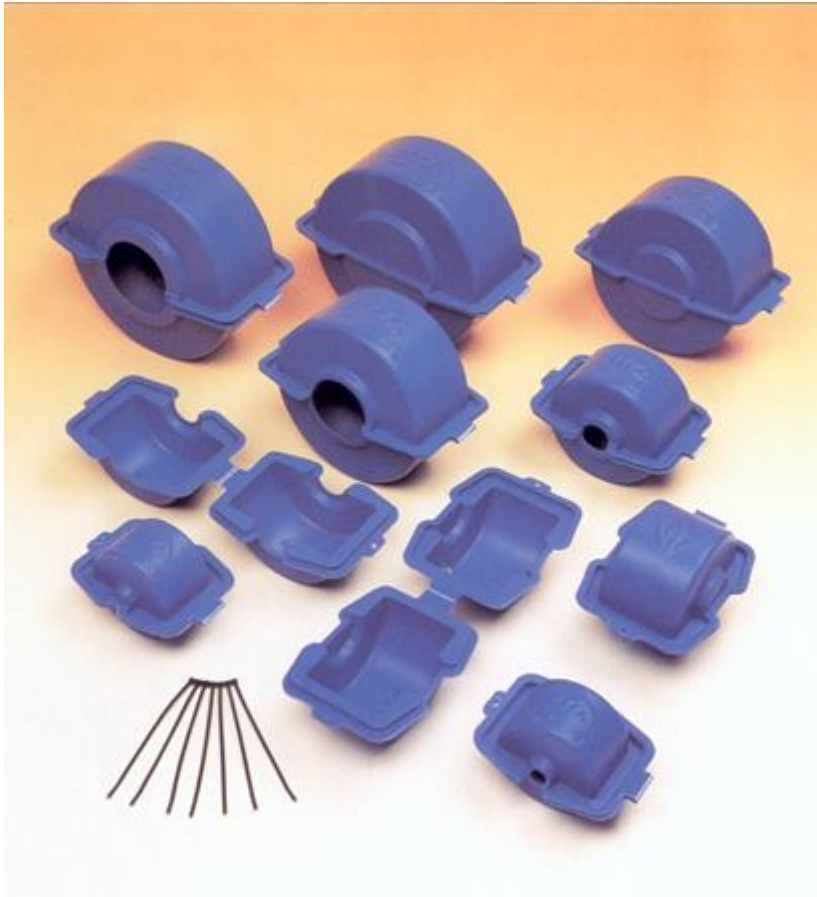

Features

- Stops the 'sprayout' of hazardous corrosive chemicals, water or steam from plastic and metal pipework flanged joints
- Manufactured in polyethylene providing resistance to a wide range of corrosive chemicals up to 100°C in temperature.
- Easy identification against all types of pipework.

Protecting People and Plant

Flanged Joints Protected within Seconds



Technical Details

- ◆ The Universal Flange Guard is available in four model sizes suitable for fitting to all types of metal and plastic pipework.
- ◆ All Flange Guards can be supplied pre-cut to the pipework size specified.
- ◆ Universal Flange Guards will fit all standard B.S, A.S.A. and D.I.N. Flanges

Specification	Model			
	100U	200U	300U	600U
OD Metric	16mm - 32mm	40mm - 63mm	75mm - 110mm	140mm - 160mm
NB Imperial	3/8" - 1.0"	1.25" - 2.0"	2.5" - 4.0"	5.0" - 6.0"
NB Metric	10mm - 25mm	32mm - 50mm	63mm - 100mm	125mm - 150mm

- ◆ The guard protects people and plant from sprayout and allows safe inspection of flanged joints.
- ◆ Universal Flange Guards are designed for ease of fitting, removal and re-use, offering a long maintenance free life.

www.chemresist.com

Chem Resist Fluid Transfer
Britannia House
Ravensthorpe Industrial Estate
Dewsbury
West Yorkshire
WF13 3SX

Email: enquiry@chemresist.com

Tel: +44 (0) 1924 492244

Fax: +44 (0) 1924-490334